




Product Information

8/2007


UFR1500 Circle-Lock, Joint Restraint for IPS PVC and C900 PVC

It may appear to look the same, work the same, but it's not the same.....

The new enhanced UFR1500 Circle-Lock, sizes 4" through 12", has modified ring segments and is easily distinguishable by *the larger bolt head* on the actuating screws.

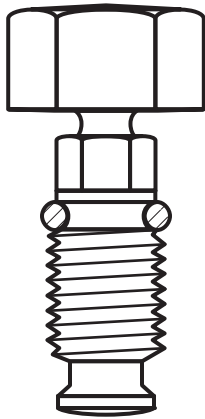

New design
Minimum torque of **60 ft-lbs.**

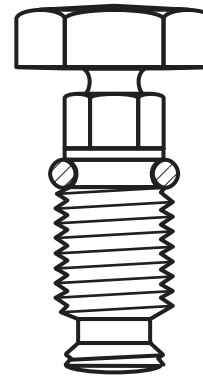

Previous design
Minimum torque of 75 ft-lbs.

FEATURES:

- No field alterations required to adapt from IPS PVC to C900 PVC pipe
- Actuating screws have an extended bolt head for easy and secure socket access
- Segments and actuating screws are field replaceable if broken or damaged
- UL/FM approved for use on listed and approved 4"-12" nominal size PVC pipe, tested to and exceeds the requirements of ASTM F-1674



NOMINAL PIPE SIZE	PVC PIPE O.D. RANGE (INCHES)	CATALOG NUMBER	NO. OF RESTRAINT SEGMENTS	PRESSURE RATING				AWWA C-909
				ASTM D2241 IPS PVC PIPE		AWWA C-900		
				SDR-21	SDR-26	DR-14	DR-18	
4"	4.50 - 4.80	UFR1500-4	4	200 PSI	160 PSI	200 PSI	150 PSI	CONTACT FACTORY
6"	6.63 - 6.90	UFR1500-6	6					
8"	8.63 - 9.05	UFR1500-8	6					
10"	10.75 - 11.10	UFR1500-10	8					
12"	12.75 - 13.20	UFR1500-12	8					

