




Wide Range Coupling

Product Development

08/2009

Ford extends the "Ultra-Flex" FC2W Wide Range Coupling product line

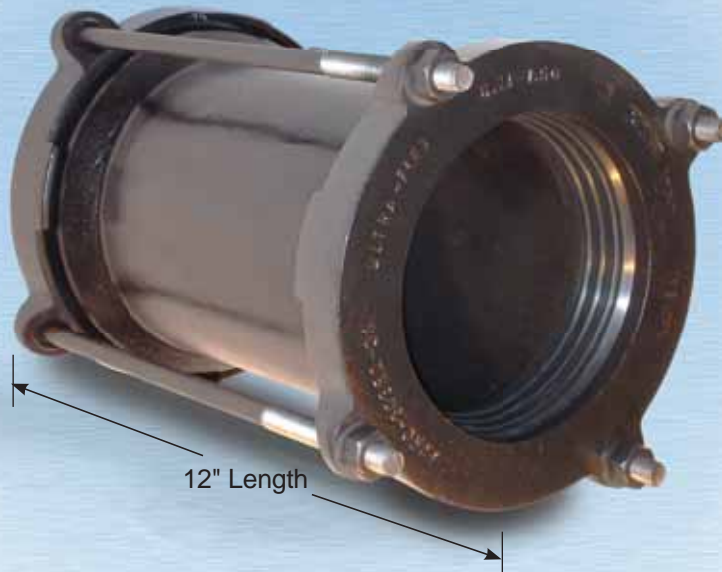

FEATURES

- Stab fitting for easy installation, no field adaptation required
- Specially designed, pre-lubricated Buna-N gaskets
- Fusion-Bonded Epoxy coating
- 350 psi rated working water pressure
- Available in six nominal sizes
- 12" long center sleeve (Standard 7" and 9")



NOMINAL PIPE SIZE	RANGE (INCHES)	RANGE (MM)	SLEEVE LENGTH	PART NUMBER
3"	2.50 - 4.29	63.5 - 109.0	12"	FC2W-3-L12
4"	3.96 - 5.60	100.6 - 142.2	12"	FC2W-4-L12
6"	6.23 - 7.60	158.2 - 193.0	12"	FC2W-6-L12
8"	8.40 - 9.75	213.3 - 247.6	12"	FC2W-8-L12
10"	10.75 - 12.12	273.0 - 307.8	12"	FC2W-10-L12
12"	12.75 - 14.38	323.8 - 365.2	12"	FC2W-12-L12

Smaller pipe diameters may be accommodated within each nominal size at a reduced pressure rating. Contact factory for details.

MATERIALS

- Center Sleeve: Ductile Iron per ASTM A536 (65-45-12)
- End Rings: Ductile Iron per ASTM A536 (65-45-12)
- Bolts and Nuts: HSLA steel per ASTM A242 and AWWA C111 (304 or 316 Stainless Steel or blue fluorocarbon coating optional)
- Coatings: Black, fusion bonded epoxy applied per AWWA C213
- Gaskets: Buna-N rubber per ASTM D2000 (EPDM rubber per ASTM D2000 optional)

For additional information on this, or any other Ford product, contact your local Ford Distributor or The Ford Meter Box Company.

The Ford Meter Box Company, Inc. 775 Manchester Avenue, P.O. Box 443, Wabash, Indiana, USA 46992-0443
Telephone: 260-563-3171 FAX: 800-826-3487 Overseas FAX: 260-563-0167 <http://www.fordmeterbox.com>