



SUBMITTAL INFORMATION

Ball Corporation Stop - (B1000-x style)



AWWA/CC TAPER THREAD INLET BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

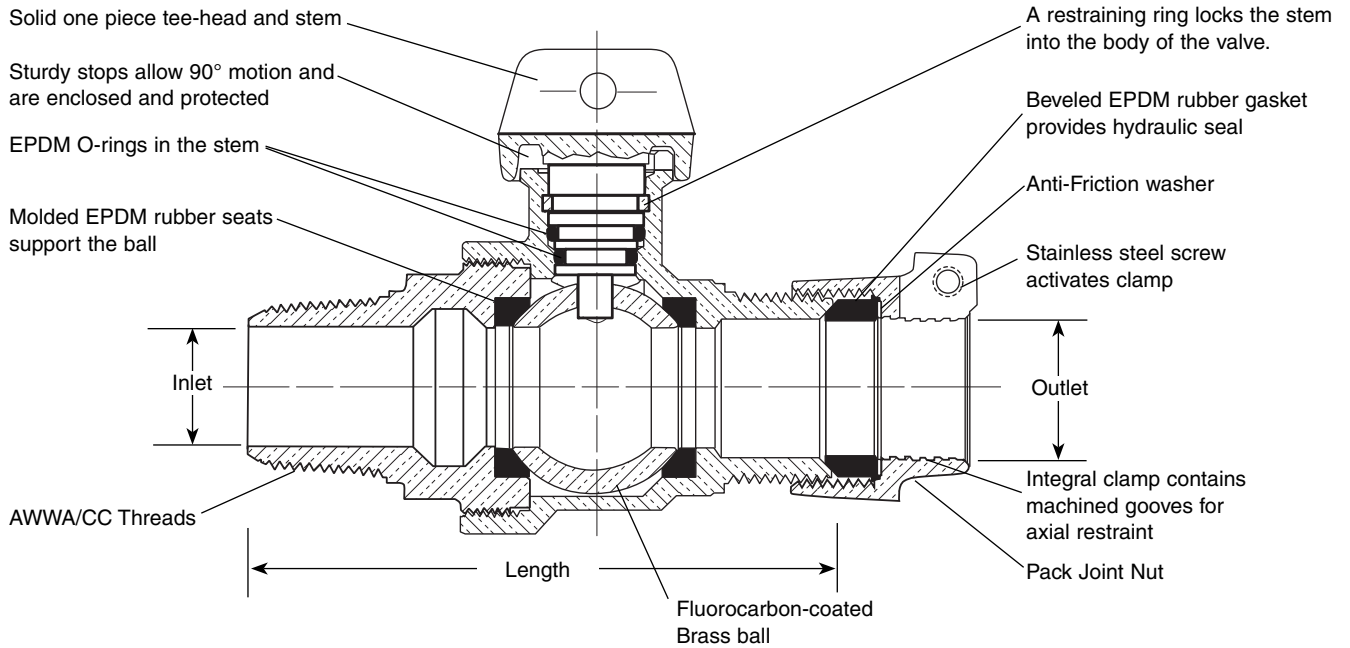

VALVE SIZE	INLET SIZE	OUTLET SIZE	VALVE LENGTH	BODY OUTLET THREADS	APPROX Wt. LBS,	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
3/4"	3/4"	3/4"	4-9/16"	3/4" Flare Copper	2.2	B1000-3	
1"	1"	1"	4-15/16"	1" Flare Copper	3.1	B1000-4	
1-1/2"	1-1/2"	1-1/2"	8"	1-1/2" Flare Copper	8.3	B1000-6	
2"	2"	2"	8-1/32"	2" Flare Copper	8.9	B1000-7	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

Note: This design does not meet Sec. 4.3.1.2 of the Awwa C800 Standard regarding body dimensions. Verify valve length with drilling machine travel limitations before ordering and prior to making tap.

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Ends are integral or secured with adhesive to prevent unintentional disassembly.
- 300 PSI working pressure.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

06/21/07

Submitted By: