



# SUBMITTAL INFORMATION

## Grip Joint Coupling - (C04-xx-G style)



### FEMALE COPPER THREAD BY GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS)

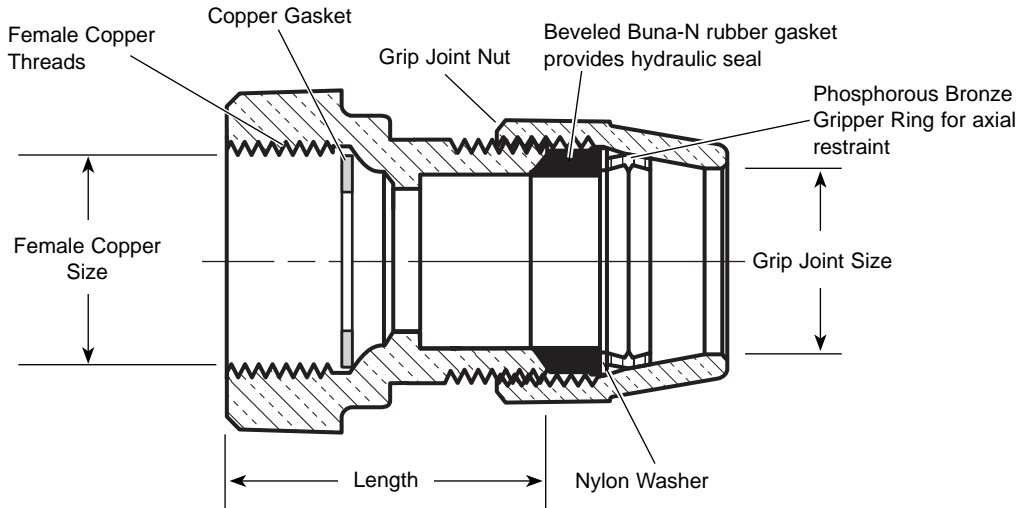

DESCRIPTION		LENGTH	APPROX. Wt. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
FEMALE COP. THRD	G.J. FOR CTS				
5/8"	3/4"	1-9/16"	.7	▼ C04-23-G	
3/4"	3/4"	1-13/16"	.7	▼ C04-33-G	
3/4"	1"	2"	.8	▼ C04-34-G	
1"	3/4"	2-1/16"	1.0	▼ C04-43-G	
1"	1"	1-15/16"	1.0	▼ C04-44-G	
1-1/4"	1"	2-1/16"	1.0	▼▼ C04-54-G	
1-1/4"	1-1/4"	2-1/16"	1.6	▼▼ C04-55-G	
1-1/2"	1-1/2"	3-1/4"	2.5	▼▼ C04-66-G	
2"	2"	3-1/2"	4.5	▼▼ C04-77-G	



▼ UL Classified to ANSI/NSF Standard 61.

▼▼ Add "-K" to end of catalog number for item to be UL classified to ANSI/NSF Standard 61.

**Note:** Ford recommends insert stiffeners when using plastic pipe or tubing.

### FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Sleeve design provides hexagonal wrench flats for proper installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

11/25/03

Submitted By: