



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx-ESH style)



10" & 12" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH DIFFERENT O.D.'S

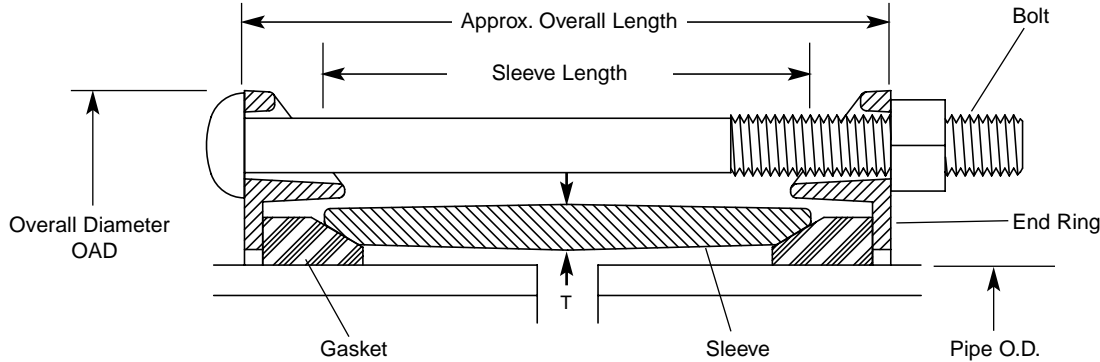

NOM. PIPE SIZE	GASKET RANGE		END RING	BY	GASKET RANGE		END RING	CENTER SLEEVE		BOLTS		APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
	1ST HALF	CAT. #			2ND HALF	CAT. #		LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.					
10"	10.75	Red	10.75	Red	6"	7/16"	5/8"	9"	6	7-1/8"	15-11/16"	48	FC2A-1075-1075-ESH			
	10.75	Red	11.10 - 11.40	Blk									FC2A-1075-1140-ESH			
	10.75	Red	11.42 - 11.77	Blk									FC2A-1075-1177-ESH			
	10.75	Red	11.77 - 12.12	Wht/Gry									FC2A-1075-1212-ESH			
	11.10 - 11.40	Blk	11.10 - 11.40	Blk									FC2A-1140-1140-ESH			
	11.10 - 11.40	Blk	11.42 - 11.77	Blk									FC2A-1140-1177-ESH			
	11.10 - 11.40	Blk	11.77 - 12.12	Wht/Gry									FC2A-1140-1212-ESH			
	11.42 - 11.77	Blk	11.42 - 11.77	Blk									FC2A-1177-1177-ESH			
	11.42 - 11.77	Blk	11.77 - 12.12	Wht/Gry									FC2A-1177-1212-ESH			
	11.77 - 12.12	Wht/Gry	11.77 - 12.12	Wht/Gry									FC2A-1212-1212-ESH			
	12.75	Blk	12.75	Blk									FC2A-1275-1275-ESH			
12"	12.75	Blk	13.20 - 13.50	Blk	6"	1/2"	5/8"	9"	7"	7-1/8"	18"	56	FC2A-1275-1350-ESH			
	12.75	Blk	13.69 - 14.04	Wht/Gry									FC2A-1275-1404-ESH			
	12.75	Blk	14.03 - 14.38	Wht/Gry									FC2A-1275-1438-ESH			
	13.20 - 13.50	Blk	13.20 - 13.50	Blk									FC2A-1350-1350-ESH			
	13.20 - 13.50	Blk	13.69 - 14.04	Wht/Gry									FC2A-1350-1404-ESH			
	13.20 - 13.50	Blk	14.03 - 14.38	Wht/Gry									FC2A-1350-1438-ESH			
	13.69 - 14.04	Wht/Gry	13.69 - 14.04	Wht/Gry									FC2A-1404-1404-ESH			
	13.69 - 14.04	Wht/Gry	14.03 - 14.38	Wht/Gry									FC2A-1404-1438-ESH			
	14.03 - 14.38	Wht/Gry	14.03 - 14.38	Wht/Gry									FC2A-1438-1438-ESH			

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Ductile Iron per ASTM A536 (65-45-12)
- End Rings: Ductile Iron per ASTM A536 (65-45-12)
- Bolts and Nuts: 304 Stainless Steel per ASTM A193 and A194
- Coating: Fusion-bonded Epoxy. Applied per AWWA C213
- NSF61: NSF 61 Approved
- Gasket: Molded SBR Rubber per ASTM D2000, M4AA810

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

01/16/02

Submitted By: