



SUBMITTAL INFORMATION

Fabricated Steel Coupling - (FC4-xxxx-BxxR style)



30" - 60" STYLE FC4 COUPLINGS FOR JOINING STEEL SIZE PIPES WITH THE SAME O.D.

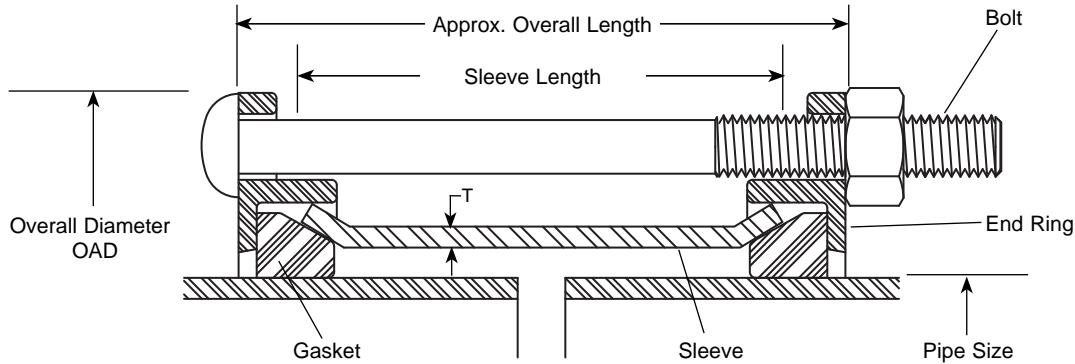

NOM. PIPE SIZE	PIPE O.D.	CENTER SLEEVE		APPROX. OVERALL LGTH.	BOLT			APPROX. WT. LBS.	OAD	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		LGTH.	(T) THICKNESS		DIA.	LGTH.	QTY.					
30"	30.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	16	159	34-5/8"	361	FC4-3000-B07R	
	30.00	10"		11-1/8"		13-1/2"		189			FC4-3000-B10R	
36"	36.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	18	190	40-5/8"	306	FC4-3600-B07R	
	36.00	10"		11-1/8"		13-1/2"		229			FC4-3600-B10R	
42"	42.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	20	257	47-1/8"	263	FC4-4200-B07R	
	42.00	10"		11-1/8"		13-1/2"		302			FC4-4200-B10R	
48"	48.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	22	294	53-1/8"	231	FC4-4800-B07R	
	48.00	10"		11-1/8"		13-1/2"		345			FC4-4800-B10R	
54"	54.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	24	339	60-1/8"	210	FC4-5400-B07R	
	54.00	10"		11-1/8"		13-1/2"		398			FC4-5400-B10R	
60"	61.00	7"	3/8"	8-1/8"	5/8"	10-1/2"	26	378	66-1/8"	200	FC4-6100-B07R	
	61.00	10"		11-1/8"		13-1/2"		444			FC4-6100-B10R	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Carbon Steel per ASTM A36
- End Rings: Cold Rolled Carbon Steel per AISI 1020
- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: Black Alkyd Enamel Shop Coat - NSF61 Approved
- Gasket: Extruded SBR rubber per ASTM D2000 M4AA810 with Heat Bonded Joint

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

10/07/09

Submitted By: