


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxx-x-MJ style)



STEEL TAPPING SLEEVE - EPOXY COATED WITH 304 STAINLESS HARDWARE - 4" TO 16"



Connecting Gasket is Buna-N per ASTM D2000

Flange - ASTM A36 Carbon Steel

3/4-14 Brass Test Plug

Bolts and Nuts - Grade 18-8 type 304 stainless steel

Finish - Fusion-bonded epoxy coating no less than 12 mils thick

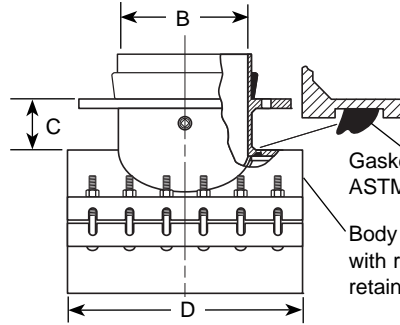

Gasket - Buna-N (Nitrile) ASTM D2000 BA508.

Body - Heavy welded steel with recessed grooves to retain gaskets.



NOM. PIPE SIZE	SLEEVE O.D. RANGE	BY	FLANGE SIZE CODE***	NOMINAL DIMENSIONS - INCHES				No. OF BOLTS	APPROX. Wt. LBS.	SLEEVE NUMBER***	✓ SUBMITTED ITEM(S)
				A	B	C	D				
4"	4.50	X	4	5-1/32	4-1/4	5-3/16	12	6	45	▼ *FTSC-450-x-MJ	
	4.80									▼ *FTSC-480-x-MJ	
6"	6.57-6.73	X	4	5-1/32	4-1/4	5-3/16	12	6	70	▼ *FTSC-673-x-MJ	
	6.83-7.16									▼ FTSC-716-x-MJ	
	7.20-7.60									▼ FTSC-760-x-MJ	
	7.40-7.73									▼ FTSC-773-x-MJ	
8"	7.95-8.05	X	4	5-1/32	4-1/4	5-3/16	12	6	76	▼ **FTSC-805-x-MJ	
	8.36-8.75									▼ *FTSC-875-x-MJ	
	8.73-9.12									▼ FTSC-912-x-MJ	
	8.89-9.37									▼ FTSC-937-x-MJ	
10"	9.27-9.69	X	8	9-1/32	8-1/4	5-3/16	16	8	93	▼ FTSC-969-x-MJ	
	9.95-10.10									▼ **FTSC-1010-x-MJ	
	10.45-10.88									▼ FTSC-1088-x-MJ	
	11.03-11.47									▼ FTSC-1147-x-MJ	
12"	11.36-11.80	X	10	11-1/32	10-1/4	5-3/16	20	10	139	▼ FTSC-1180-x-MJ	
	11.76-12.20									▼ **FTSC-1220-x-MJ	
	12.42-12.88									▼ FTSC-1288-x-MJ	
	13.13-13.60									▼ FTSC-1360-x-MJ	
14"-16"	13.60-14.09	X	10	11-1/32	10-1/4	5-3/16	20	10	190	▼ FTSC-1409-x-MJ	
	14.10-14.58									▼ FTSC-1458-x-MJ	
	14.59-15.08									▼ **FTSC-1508-x-MJ	
	15.23-15.72									▼ FTSC-1572-x-MJ	
14"-16"	15.73-16.22	X	8	9-1/32	8-1/4	5-3/16	16	8	152	▼ FTSC-1622-x-MJ	
	16.30-16.73									▼ FTSC-1673-x-MJ	
	16.74-17.26									▼ FTSC-1726-x-MJ	

*Size on size taps for these units may require a 1/2" under size cutter.

** Size on size for this range not available.

*** **To order:** Add Flange Size Code to the Sleeve Number. Example: A 4" flange on 6" cast iron pipe would be FTSC-716-4-MJ.

▼ UL Classified to ANSI/NSF Standard 61.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of Grade 18-8 type 304 stainless steel.
- Ring style gasket is Buna-N (Nitrile) ASTM D2000 BA508.
- Fusion-bonded epoxy-coating on body is no less than 12 mils thick.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

02/05/10

Submitted By: