



SUBMITTAL INFORMATION

Straight Dual Cartridge Check Valve - (HHC38-xxx-NL style)



METER SWIVEL NUT INLET BY MALE IRON PIPE OUTLET

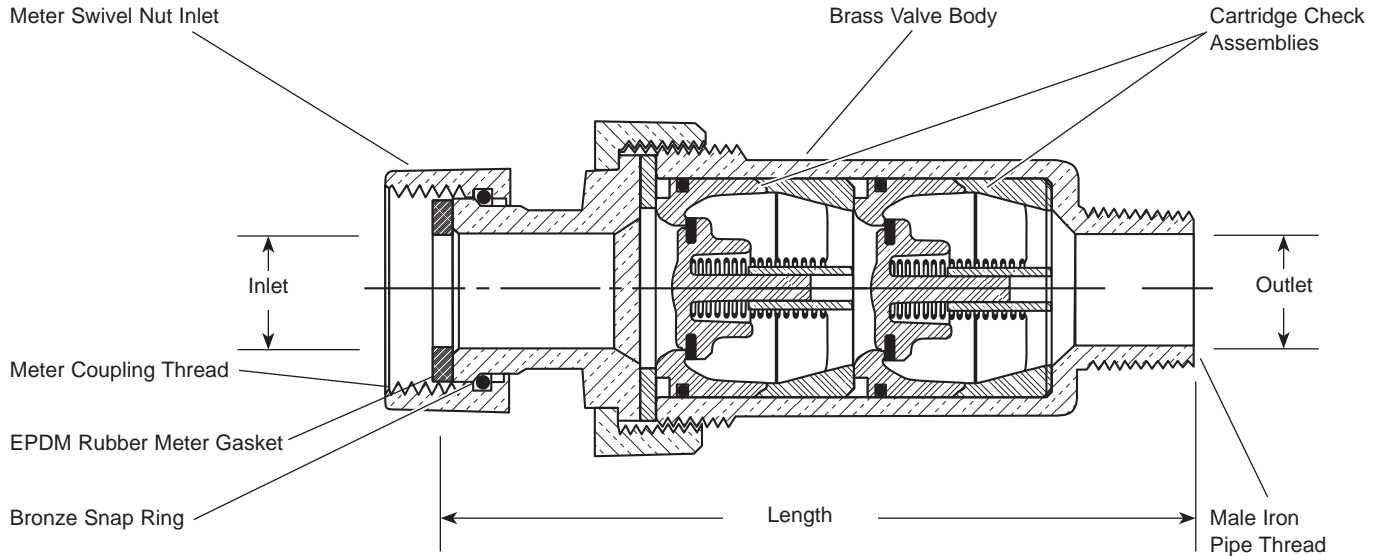

VALVE SIZE	METER INLET SIZE	OUTLET SIZE	LENGTH	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
3/4"	5/8"	3/4"	4-7/8"	1.5	HHC38-313-NL	
3/4"	5/8" x 3/4" & 3/4"	3/4"	4-7/8"	1.6	HHC38-323-NL	

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS NO C89833)
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Conforms to AWWA C700 for Meter threads
- UL Classified to ANSI/NSF Standard 61
- The product has the letters "NL" cast into the main body for proper identification
- ASSE 1024 Approved
- Accessible through the union swivel inlet for inspection and replacement of internal working parts. Replacement kits are available
- 175 PSI maximum working water pressure
- 180 degree Fahrenheit maximum constant temperature

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

02/04/10

Submitted By: