



SUBMITTAL INFORMATION

Straight Cascading Dual Check Valve - (HHS11-777 style)



FEMALE IRON PIPE THREAD INLET AND OUTLET

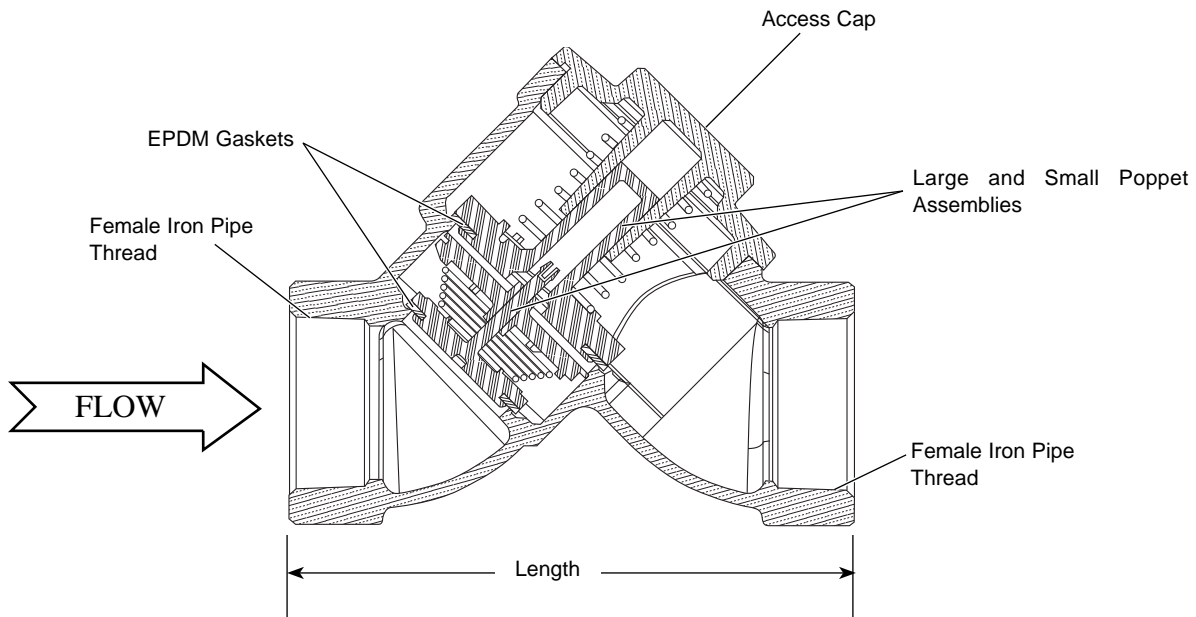

| VALVE SIZE | FIP INLET SIZE | FIP OUTLET SIZE | LENGTH (IN.) | APPROX. WT. LBS. | CATALOG NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|----------------|-----------------|--------------|------------------|----------------|---------------------|
| 2" | 2" | 2" | 7-3/8" | 8.1 | HHS11-777 | |

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5).
- In-line accessible for quick inspection and replacement of internal working parts without removing the valve from the service line. Replacement kits are available.
- 175 psi maximum working water pressure
- 180-degree Fahrenheit maximum constant temperature

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

12/17/07

Submitted By: