



SUBMITTAL INFORMATION

Straight Single Check Valve - (HS81-xxx style)



MALE IRON PIPE THREAD INLET BY FEMALE IRON PIPE THREAD OUTLET

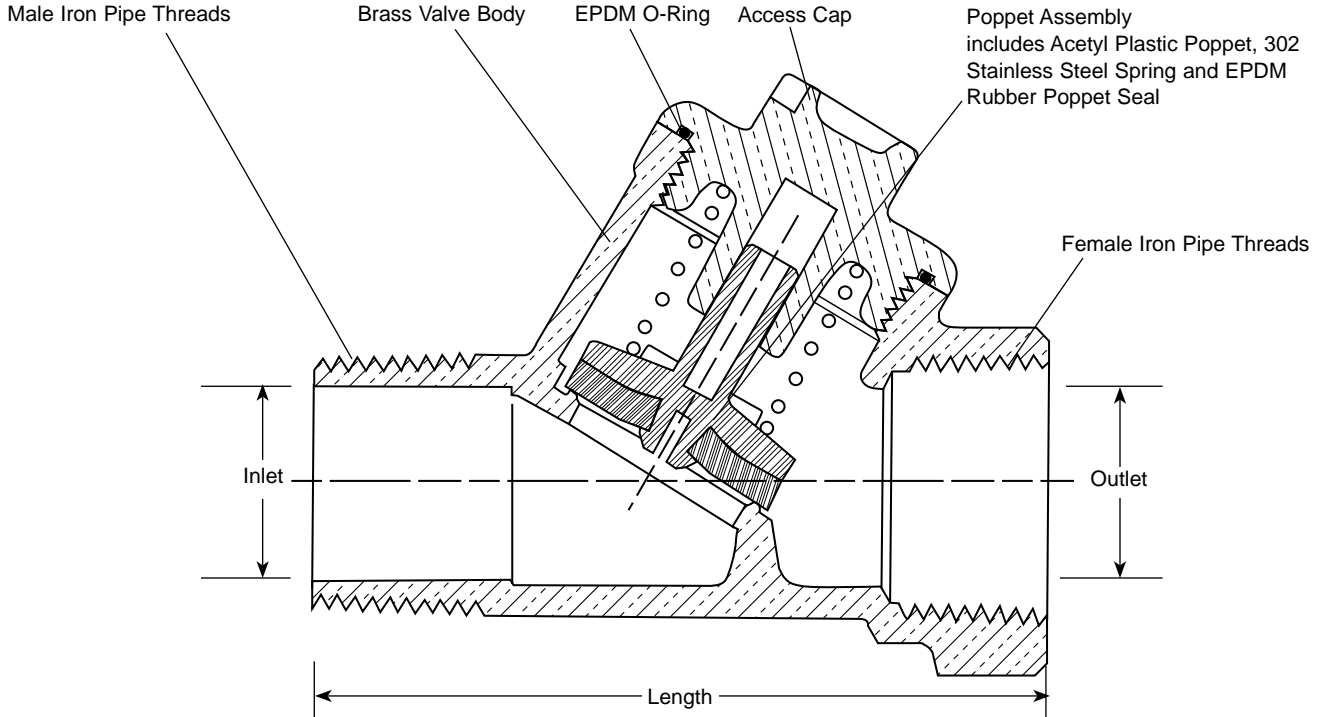

| VALVE SIZE | INLET SIZE | OUTLET SIZE | LENGTH | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|----------|-----------------|-------------|---------------------|
| 3/4" | 3/4" | 3/4" | 3-17/32" | 1.2 | ▼▼ HS81-333 | |
| 1" | 1" | 1" | 3-3/4" | 1.4 | ▼▼ HS81-444 | |

▼▼ Add "-K" to end of catalog number for item to be UL classified to ANSI/NSF Standard 61.

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and/or ASTM B-584, UNS NO C83600 - 85-5-5-5).
- In-line accessible for quick inspection and replacement of internal working parts without removing the valve from the service line. Replacement kits are available.
- 175 PSI maximum working water pressure.
- 180 degree Fahrenheit maximum constant temperature.
- Conforms to AWWA C700 for Meter Threads.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

12/27/07

Submitted By: