



# SUBMITTAL INFORMATION

## 90 Series Coppersetter - (VH92-xx-41-33x-G style)



ANGLE KEY VALVE BY ANGLE CHECK VALVE (5/8" X 3/4" METER)

GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY DOUBLE PURPOSE UNION SWIVEL OUTLET

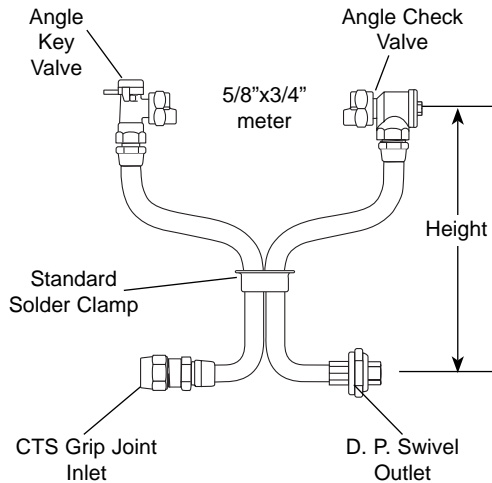

### Coppersetter Part Number

HEIGHT (INCHES)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
12	6.6	VH92-12W-41-33x-G	
15	7.4	VH92-15W-41-33x-G	
18	8.0	VH92-18W-41-33x-G	
21	8.3	VH92-21W-41-33x-G	
24	8.6	VH92-24W-41-33x-G	


x = Add Option Code to catalog number if required. See tables below.

### Option Codes for 90 Series Coppersetters

OPTION	EXTENSION TO CATALOG NUMBER
Brace Eye	Add "E" to Cat. No.
Bolted Clamp Construction	Add "C" to Cat. No.
15" outlet tube extension	Add "A" to Cat. No.
15" outlet tube extension & brace eye	Add "H" to Cat. No.
15" outlet tube extension & bolted clamp	Add "F" to Cat. No.
18" outlet tube extension	Add "B" to Cat. No.
18" outlet tube extension & brace eye	Add "K" to Cat. No.
18" outlet tube extension & bolted clamp	Add "J" to Cat. No.

Add extension to catalog number. Example: VH92-21W-41-33E-G

### Options

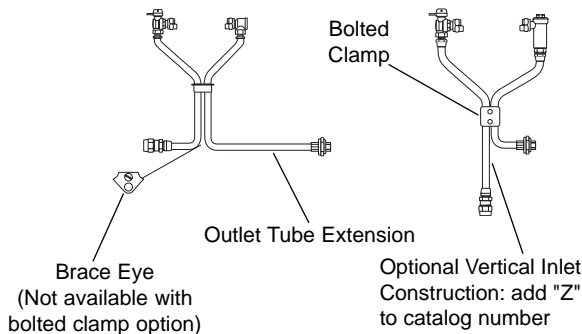

### Inlet Tube Options for 90 Series Coppersetters

OPTION	COPPERSETTER SIZE	INLET TUBE OPTION CODE
15" inlet tube extension	5/8" x 3/4"	Add "P" to Cat. No.
18" inlet tube extension	5/8" x 3/4"	Add "S" to Cat. No.
Vertical inlet extension	5/8" x 3/4"	Add "Z" to Cat. No.

Place catalog inlet tube code to the left of any other extension option from the top option table. Example: VH92-21W-41-33ZE-G

### Service Line Size

INLET	OUTLET
3/4" CTS Grip Joint	3/4" D.P. Swivel

Ford recommends using insert stiffeners with plastic pipe or tubing.

### FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Saddle nuts hold the meter in place for tightening.
- Brace eye is optional for all 90 Series Coppersetters with standard solder clamp.
- Outlet tube extension and bolted clamp construction are optional on 90 Series.
- Double purpose union swivels will accommodate male iron pipe threads or flare copper.
- All Ford Setters are assembled with lead-free solder.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

06/01/04

Submitted By: