


SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FASTP-xxxx-x style)



STAINLESS STEEL TAPPING SLEEVE FOR HDPE PIPE


Flange - Stainless steel with recess per MSS SP-60 to accept standard tapping valves. Flange conforms to AWWA C228 Class D ANSI 150# drilling. Optional carbon steel flange, per AWWA C207, is available.

Lifter bar - Type 304 stainless steel provides a heavy bearing surface for nuts.

Washers - Belleville spring washer 17-7 PH stainless steel

Studs and nuts Type 304 stainless steel. Nuts are coated to prevent galling.

Outlet Pipe - Schedule 5. ASTM A240 type 304 stainless steel except 4" is Schedule 10

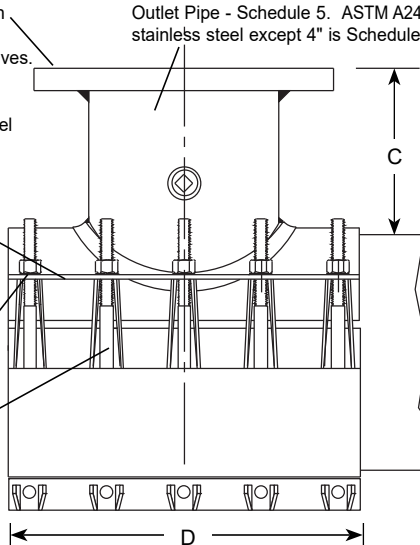

3/4-14 No-Lead Brass Test Plug



Outlet Gasket - Virgin NBR (Buna-N) compounded for water service, per ASTM D2000. Outlet gasket assures complete seal of outlet area.

Body & Strap — Type 304, stainless steel all welds are fully passivated to restore stainless characteristics.

Armors - Heavy gage Type 304 stainless steel are vulcanized to gasket to bridge the gap between lugs.

Full Gasket - Gridded Virgin SBR compounded for water service, per ASTM D2000. Full gasket gives 360° pipe coverage.

NOM. PIPE SIZE	SLEEVE O.D. RANGE	BY	SS ** FLANGE SIZE	APPROX. WT.	NOMINAL DIMENSIONS - INCHES				SADDLE THICKNESS (GAGE)	STRAP THICKNESS (GAGE)	STUD SIZE	No. STUDS	CATALOG NUMBER**	✓ SUBMITTED ITEM(S)
					A	B	C	D						
16"	16.00 17.40	X	4	75	5-1/32	4-1/4	5-3/16	16	.105" (12)	.063" (16)	5/8"	15	FASTP-1600-x FASTP-1740-x	
			6	79	7-1/32	6-3/8	5-1/2	16				15		
			8	100	9-1/32	8-5/16	5-5/8	20				18		
			10	105	11-1/32	10-1/4	6-1/8	20				18		
			12	141	13-1/32	12-1/4	6-1/4	24				21		
18"	18.00 19.50	X	4	77	5-1/32	4-1/4	5-3/16	16	.105" (12)	.063" (16)	5/8"	15	FASTP-1800-x FASTP-1950-x	
			6	81	7-1/32	6-3/8	5-1/2	16				15		
			8	103	9-1/32	8-5/16	5-5/8	20				18		
			10	108	11-1/32	10-1/4	6-1/8	20				18		
			12	144	13-1/32	12-1/4	6-1/4	24				21		
20"	20.00 21.60	X	4	87	5-1/32	4-1/4	5-3/16	16	.105" (12)	.063" (16)	5/8"	15	FASTP-2000-x FASTP-2160-x	
			6	91	7-1/32	6-3/8	5-1/2	16				15		
			8	115	9-1/32	8-5/16	5-5/8	20				18		
			10	120	11-1/32	10-1/4	6-1/8	20				18		
			12	158	13-1/32	12-1/4	6-1/4	24				21		
24"	24.00 25.80 26.00	X	4	75	5-1/32	4-1/4	5-3/16	16	.105" (12)	.063" (16)	5/8"	15	FASTP-2400-x FASTP-2580-x FASTP-2600-x	
			6	79	7-1/32	6-3/8	5-1/2	16				15		
			8	100	9-1/32	8-5/16	5-5/8	20				18		
			10	105	11-1/32	10-1/4	6-1/8	20				18		
			12	141	13-1/32	12-1/4	6-1/4	24				21		

** To order: Add flanged outlet size to catalog number. Example: The complete FASTP catalog number for an 20" pipe (21.60 O.D.) with a 12" stainless steel flange is FASTP-2160-12. For a carbon steel flange, add "A" to the catalog number. Example: FASTP-2160-12A

FEATURES

- Body, straps and UNC threaded studs are made of type 304 stainless steel
- Flange can be either type 304 stainless steel or ASTM A36 carbon steel
- All sleeves are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) rubber per ASTM D2000
- Belleville spring washers allow for limited pipe expansion and contraction
- UL classified to ANSI/NSF standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

08/14/17

Submitted By: