



SUBMITTAL INFORMATION


Repair Clamps - (FS3-xxxx style)



THREE SECTION ALL STAINLESS STEEL REPAIR CLAMPS

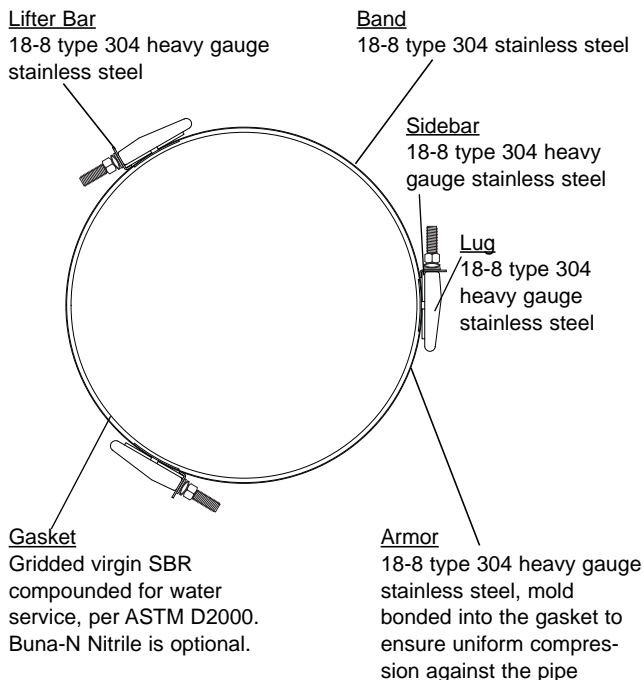


Bolts & Nuts
18-8 type 304 stainless steel nuts and washers. Nuts are coated to prevent galling.

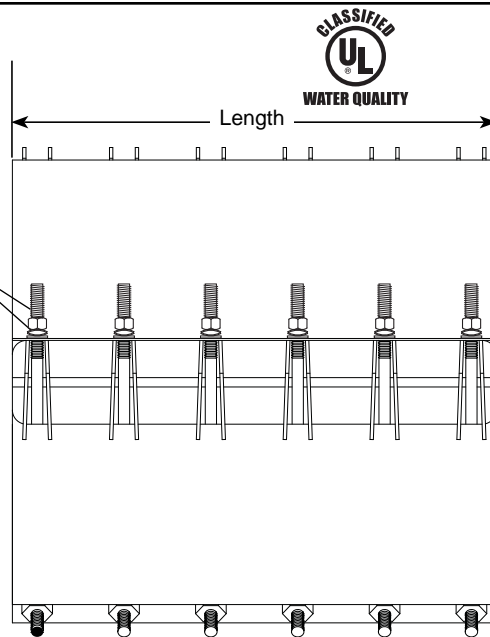

OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
Thread	Code No.	Thread	Code No.
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

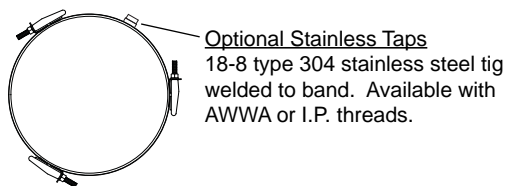

NOM. PIPE SIZE	PIPE O.D. RANGE	LENGTH AND APPROX. WEIGHT (LBS.)					BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM		
		12.5"	15"	20"	24"	30"						
16"	15.92 - 17.12	31	40	52	64	77	5/8" 11 UNC	20 GA.	FS3-1712 X LENGTH			
	17.10 - 18.30								FS3-1830 X LENGTH			
18"	18.00 - 19.20	35	44	56	68	84			FS3-1920 X LENGTH			
	19.50 - 20.70								FS3-2070 X LENGTH			
20"	21.60 - 22.80	41	48	60	73	89			FS3-2280 X LENGTH			
	22.80 - 24.00								FS3-2400 X LENGTH			
24"	24.45 - 25.65	46	53	65	79	102			FS3-2565 X LENGTH			
	25.80 - 27.00								FS3-2700 X LENGTH			
	29.62 - 30.82								FS3-3082 X LENGTH			
30"	31.22 - 32.42	51	58	69	83	108			FS3-3242 X LENGTH			
Number of studs		12	12	18	21	27						

FEATURES

- Buna-N Gasket and Conductivity Strips are available
- Optional Outlet Taps are available for repair of service line pull-outs. Add tapping code to Catalog Number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- UL Classified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

01/26/16

Submitted By: