



SUBMITTAL INFORMATION

Fabricated Steel Transition Coupling - (FC5-xxxx-xxxx-BxxY style)



30" - 48" STYLE FC5 COUPLINGS FOR JOINING PIPES WITH DIFFERENT O.D.'S

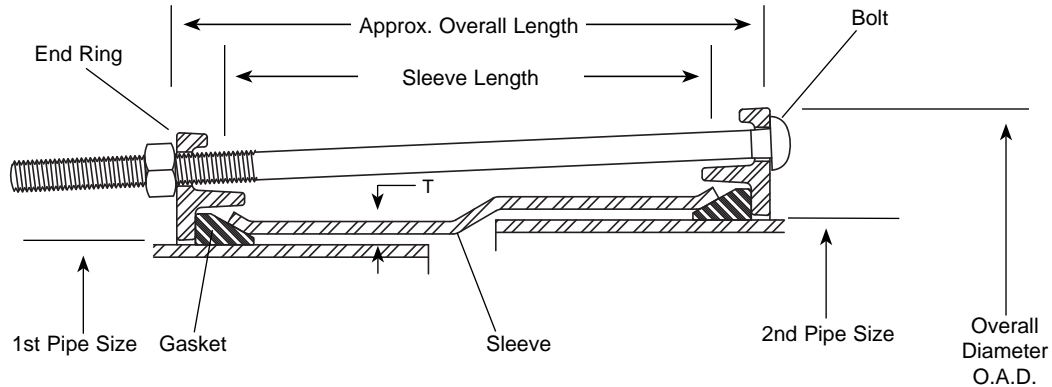

NOM. PIPE SIZE	1ST END PIPE O.D.	BY	2ND END PIPE O.D.	CENTER SLEEVE		BOLTS			APPROX. OVERALL LENGTH	OAD	APPROX. WT. LBS.	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
				(T) THICKNESS	LGTH.	DIA.	LGTH.	QTY.						
30"	32.00	X	32.40	3/8"	10"	5/8"	13-1/2"	16	11-1/8"	37"	184	230	FC5-3200-3240-B10Y	
36"	38.30		38.70	3/8"	10"	5/8"	13-1/2"	18	11-1/8"	43-13/16"	267	193	FC5-3830-3870-B10Y	
	38.30	38.70	15"		5/8"	17-1/2"	18	16-1/8"	43-13/16"	341	193	FC5-3830-3870-B15Y		
42"	44.20	X	44.50	3/8"	10"	5/8"	13-1/2"	20	11-1/8"	49-5/8"	318	250	FC5-4420-4450-B10Y	
	44.50		45.10		10"	5/8"	13-1/2"	20	11-1/8"	50-1/4"	320	250	FC5-4450-4510-B10Y	
	44.50		45.10		15"	5/8"	17-1/2"	20	16-1/8"	50-1/4"	415	250	FC5-4450-4510-B15Y	
	44.50		45.58		10"	5/8"	13-1/2"	20	11-1/8"	50-11/16"	320	250	FC5-4450-4558-B10Y	
48"	50.50	X	50.80	3/8"	10"	5/8"	13-1/2"	22	11-1/8"	55-15/16"	363	220	FC5-5050-5080-B10Y	
	50.80		51.40		10"	5/8"	13-1/2"	22	11-1/8"	56-1/2"	363	220	FC5-5080-5140-B10Y	
	50.80		51.40		15"	5/8"	13-1/2"	22	16-1/8"	56-1/2"	465	220	FC5-5080-5140-B15Y	
	50.80		51.98		10"	5/8"	13-1/2"	22	11-1/8"	57-1/8"	363	220	FC5-5080-5198-B10Y	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Carbon Steel per ASTM A36
- End Rings: Cold Rolled Carbon Steel per AISI 1018-1020
- Bolts and Nuts: 304 Stainless Steel per ASTM A193 and A194
- Coating: 3M ScotchKote 206N Fusion Bonded Epoxy - NSF61 Approved
- Gasket: Extruded SBR rubber per ASTM D2000 M4AA810 with heat-bonded joint

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

11/13/09

Submitted By: