



SUBMITTAL INFORMATION

Pretzelhorn - (PH-x style)



PRETZELHORN WITHOUT SERVICE LINE CONNECTIONS

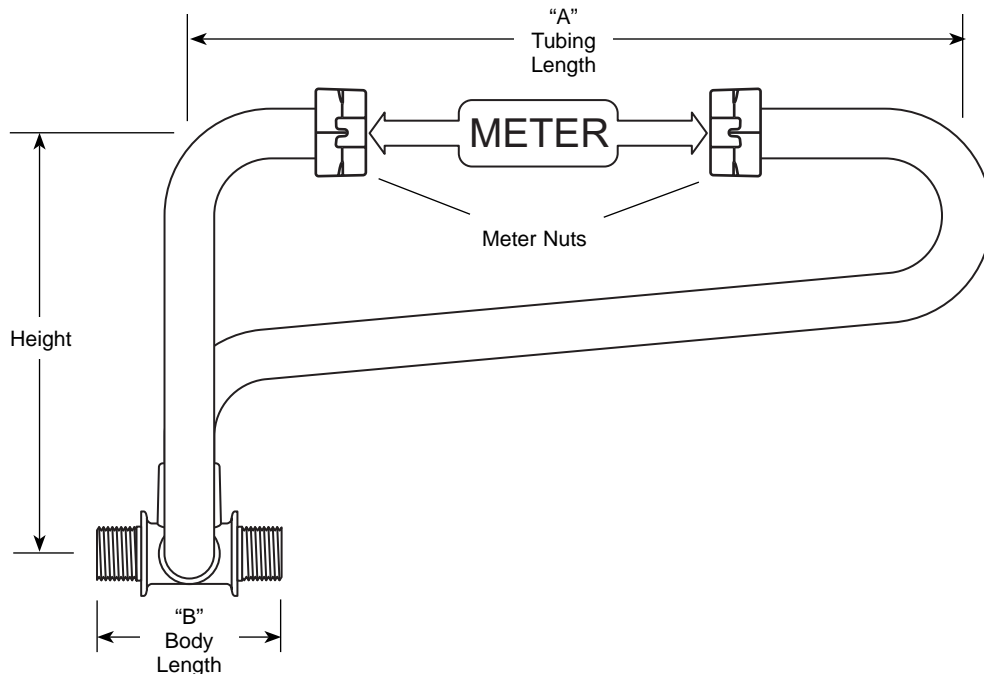

METER SIZE	METER SPACING	COPPER SIZE (O.D.)	HEIGHT	TUBING LENGTH "A"	BODY LENGTH "B"	APPROX. WT. LBS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
5/8"	7-1/2"	13/16"	8"	12"	2-1/4"	2.5	PH-1	
5/8"x3/4"	7-1/2"	13/16"	8"	12"	2-1/4"	2.6	PH-2	
3/4"	9"	15/16"	7-1/2"	13-1/2"	2-1/4"	2.7	PH-3	
1"	10-3/4"	1-1/8"	12-1/2"	17"	3-1/4"	4.8	PH-4	

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, NO C83600 - 85-5-5-5)
- Permanent electrical bonding is provided without straps.
- Copper tubing with full diameter bends provides excellent flow capacity.
- Can be installed in 7-1/2" of pipe and can be turned to place the meter either to the right or to the left of the cut-out section.
- Pretzelhorns are positioned to the right of the body. If left side position is required, add "-L" to the end of the catalog number. Example: PH-2-L.
- Optional detachable Pack Joint Assemblies and valves must be ordered separately.
- All Ford Setters are assembled with lead-free solder.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

10/20/05

Submitted By: