



# SUBMITTAL INFORMATION

Steel Coupling - (FC3-xxx-xx style)



4" THROUGH 12" STEEL COUPLINGS WITH STEEL OR DUCTILE IRON END RINGS

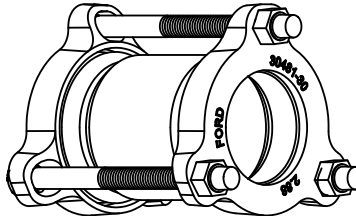

NOM. PIPE SIZE	PIPE O.D.	SLEEVE LENGTH	CATALOG NUMBER	NUMBER OF BOLTS	BOLT DIA. & LENGTH	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
4"	4.80	5"	FC3-480-5	4	5/8"x8"	16	
		7"	FC3-480-7	4	5/8"x10.5"	17	
		12"	FC3-480-12	4	5/8"x15"	27	
6"	6.90	5"	FC3-690-5	6	5/8"x8"	25	
		16"	FC3-690-16	6	5/8"x20"	50	
10"	10.75	7"	FC3-1075-7	8	5/8"x10.5"	49	
12"	12.75	5"	FC3-1275-5	8	5/8"x8"	47	
		7"	FC3-1275-7	8	5/8"x10.5"	53	
		16"	FC3-1275-16	8	5/8"x20"	88	

## FEATURES

- Center Sleeve: Carbon steel per ASTM A513
- End Rings: Steel per AISI C1010 hot rolled sheet or ductile iron per ASTM A536
- Gaskets: Special rubber gaskets compounded for water and natural gas  
Optional EPDM gaskets available, add "-S" to end of catalog number  
Optional Armor-tipped gaskets for conductivity are available, add "-ATG" to end of catalog number
- Bolts and Nuts: High strength low alloy steel per ASTM A242. Optional Type 304 stainless steel available, add "-P" to end of catalog number
- Finish: Red epoxy paint
- Rated Working Pressure: 150 psi

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

04/20/18

Submitted By: