



SUBMITTAL INFORMATION

Stainless Steel Insert Stiffeners - (INSERT-xx-xxxx-Q style)



316 STAINLESS STEEL INSERT STIFFENERS FOR HIGH DENSITY POLYETHYLENE PIPE (HDPE)

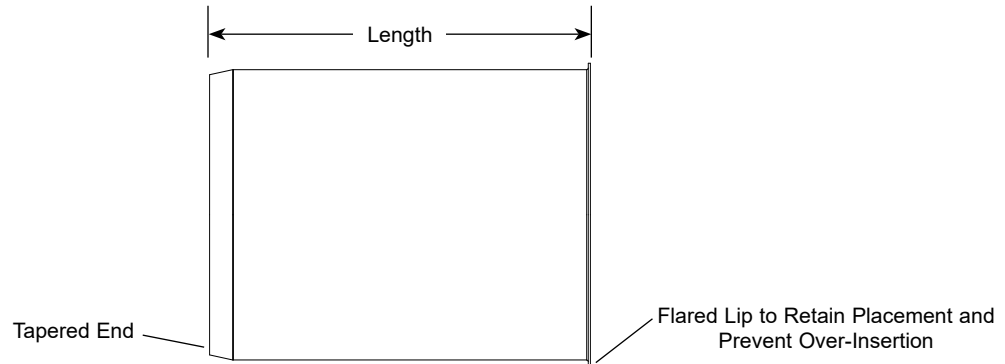

NOM. PIPE SIZE	APPROX. Wt. LBS.	LENGTH	*CATALOG NUMBER	GAUGE / THICKNESS	✓ SUBMITTED ITEM(S)
3"	1.7	6" - 8"	INSERT-3-xxx-Q	14	
4"	1.0	7-3/8"	INSERT-4-xxx-Q	20	
6"	2.1		INSERT-6-xxx-Q	18	
8"	2.8		INSERT-8-xxx-Q	18	
10"	3.5		INSERT-10-xxxx-Q	18	
12"	4.1		INSERT-12-xxxx-Q	18	
14"	5.7		INSERT-14-xxxx-Q	16	
16"	6.5		INSERT-16-xxxx-Q	16	
18"	7.4		INSERT-18-xxxx-Q	16	
20"	8.2		INSERT-20-xxxx-Q	16	
24"	9.6		INSERT-24-xxxx-Q	16	
30"	20.4		INSERT-30-xxxx-Q	12	
36"	25.0		INSERT-36-xxxx-Q	12	

*When ordering, the pipe inside diameter is required. For example, when ordering for an 8" pipe with an I.D. of 7.305", the part number is INSERT-8-731-Q. Contact factory for sizes larger than 36".

FEATURES

- Insert stiffeners are solid 316 stainless steel (ASTM A240)
- Flared to retain placement within the service line
- Tapered end to provide easy installation
- Chemically passivated to restore original corrosion resistance
- 3" design may be solid or wedged

Note: Consult pipe or tubing manufacturer for specific installation requirements.
Ford recommends using stainless steel insert stiffeners when using HDPE with certain products

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

02/16/18

Submitted By: