



SUBMITTAL INFORMATION

Uni-Flange Series (UFR1399-C-xx-U100 style)



10"-18" UNI-FLANGE SERIES 1399-C RESTRAINT DEVICE

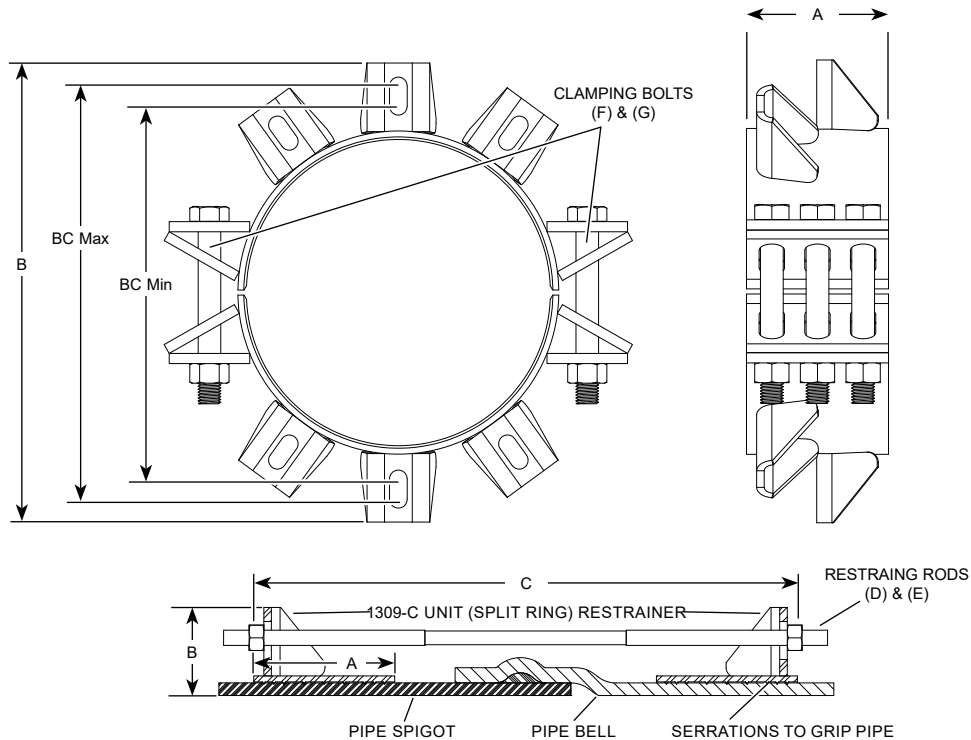

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1399-C		A	B APPROX.	C MAX	RESTRAINING BOLTS / RODS		CLAMPING BOLTS		BC MAX	BC MIN	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD	CATALOG No.				No. D	SIZE E	No. F	SIZE G				
10"	11.10	UFR1399-C-10-U100	4"	18.56"	23"	4	3/4" x 24"	4	7/8" x 7"	16.53"	14.53"	56.4	
12"	13.20	UFR1399-C-12-U100	4"	20.50"	23"	4	3/4" x 24"	4	7/8" x 7"	18.63"	16.63"	67.0	
14"	15.30	UFR1399-C-14-U100	7"	22.64"	29"	6	3/4" x 30"	12	1-1/8" x 9"	20.38"	18.44"	85.0	
16"	17.40	UFR1399-C-16-U100	7"	24.78"	29"	6	3/4" x 30"	12	1-1/8" x 9"	22.50"	20.56"	90.0	
18"	19.50	UFR1399-C-18-U100	7"	26.84"	29"	8	3/4" x 30"	12	1-1/8" x 9"	24.03"	22.63"	97.0	

FEATURES

- Manufactured from fabricated carbon steel per ASTM A36
- 360° contact and support of the pipe wall
- Restraining rods are high strength, low alloy steel per ANSI / AWWA C111 / A21.11
- Rated at full working pressure of any class of C905 PVC, minimum 2:1 safety factor
- Rated at 235 psi on DR18 C909 PVC, minimum 2:1 safety factor
- Coating: Black alkyl enamel shop coat (NSF61 Approved)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

07/11/17

Submitted By: